

JTK



旋转式夹紧器

双动型

35MPa



结构紧凑、能力大、耐久性强

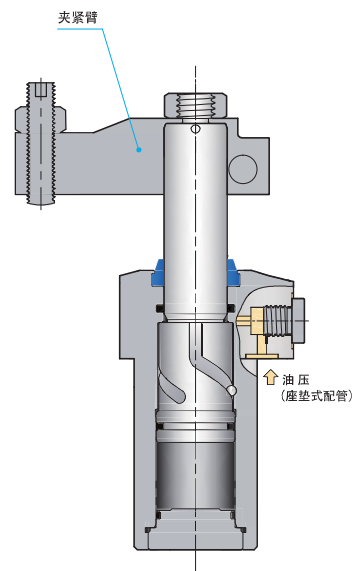

型号表示

JTK ① ②-③ (例: JTK06U-R)

	① 大小(参照规格表)	② 安装与配管型	③ 旋转方向与角度(夹紧时)
JTK	02 04 06 10 16	U : 上法兰盘 B : 下法兰盘 (N) : 嵌入式	L : 左转、旋转角度90° (L30) : 左转、旋转角度30° (L45) : 左转、旋转角度45° (L60) : 左转、旋转角度60° R : 右转、旋转角度90° (R30) : 右转、旋转角度30° (R45) : 右转、旋转角度45° (R60) : 右转、旋转角度60° (C) : 直向、旋转角度0°

规格


型 号		JTK02	JTK04	JTK06	JTK10	JTK16	
油缸能力(油压为35 MPa时)		(kN)	3.1	5.1	7.6	14.6	20.3
油缸内径		(mm)	16	22	25	35	42
主杆径		(mm)	12	16	20	25	32
油缸面积(夹紧)		(cm ²)	0.88	1.45	2.17	4.17	5.81
旋转角度		90°±3°					
		30°±5°					
		45°±5°					
		60°±5°					
定位顶丝槽位置精度		±1°					
夹紧重复定位精度		±0.5°					
全行程		(mm)	15	17	21	25.5	28.5
旋转行程		(mm)	7	9	11	13.5	16.5
夹紧行程		(mm)	8	8	10	12	12
油缸容量	夹紧	(cm ³)	1.3	2.5	4.6	10.6	16.6
	放松	(cm ³)	3.0	5.9	11.1	23.2	39.5
质 量		(kg)	0.4	0.7	1.1	2.0	3.3



旋转速度的调整


JTK 02

最短旋转时间计算公式 $t = \sqrt{\frac{1}{0.00965}}$

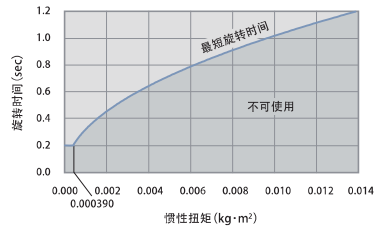


JTK 04

最短旋转时间计算公式 $t = \sqrt{\frac{1}{0.0265}}$

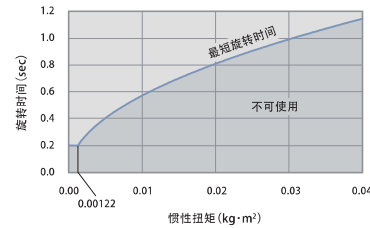


JTK 06

最短旋转时间计算公式 $t = \sqrt{\frac{1}{0.0590}}$

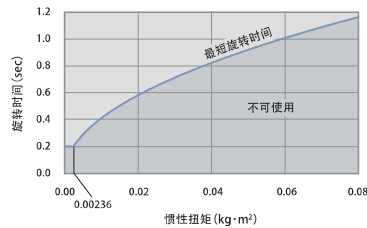


JTK 10

最短旋转时间计算公式 $t = \sqrt{\frac{1}{0.120}}$

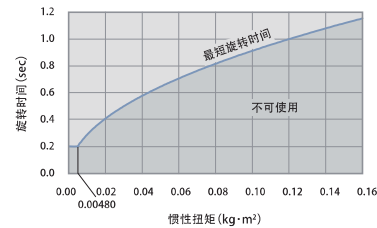

JTK 16

最短旋转时间计算公式 $t = \sqrt{\frac{1}{0.268}}$

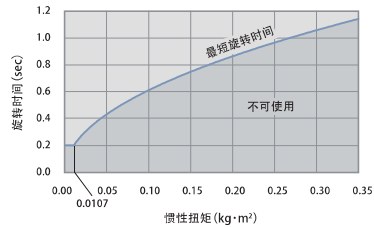


惯性扭矩的计算例

$$I = \frac{1}{12} m_1 (4A_1^2 + B^2) + \frac{1}{12} m_2 (4A_2^2 + B^2)$$

I: 惯性扭矩 (kg·m²)

m: 质量 (kg)



性能表

JTK 02		$F = \frac{P}{11.4 + 0.0625 \times LH}$										为不可使用范围	
油压 (MPa)	油缸能力 (kN)	夹紧力 (kN)										最大臂长 (mm)	
		夹紧臂长度 LH (mm)											
		20	25	30	35	40	45	50	60	70	80		
35	3.1	2.8	2.7									27	
30	2.6	2.4	2.3	2.3								32	
25	2.2	2.0	1.9	1.9	1.8	1.8						41	
20	1.8	1.6	1.5	1.5	1.5	1.4	1.4	1.4				54	
15	1.3	1.2	1.2	1.1	1.1	1.1	1.1	1.0	1.0	1.0	0.9	82	
10	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.6	0.6	↑	
5	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.3	82	

JTK 04		$F = \frac{P}{6.88 + 0.0324 \times LH}$										为不可使用范围	
油压 (MPa)	油缸能力 (kN)	夹紧力 (kN)										最大臂长 (mm)	
		夹紧臂长度 LH (mm)											
		25	30	40	50	60	70	80	90	100	120		
35	5.1	4.6	4.5	4.3								40	
30	4.4	3.9	3.8	3.7								49	
25	3.6	3.3	3.2	3.1	2.9	2.8						62	
20	2.9	2.6	2.5	2.4	2.4	2.3	2.2	2.1				84	
15	2.2	2.0	1.9	1.8	1.8	1.7	1.6	1.6	1.5	1.5	1.4	131	
10	1.5	1.3	1.3	1.2	1.2	1.1	1.1	1.1	1.0	1.0	0.9	↑	
5	0.7	0.7	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	131	

JTK 06		$F = \frac{P}{4.61+0.0185 \times LH}$										为不可使用范围	
油压 (MPa)	油缸能力 (kN)	夹紧力 (kN)										最大臂长 (mm)	
		夹臂长度 LH (mm)											
		30	40	50	60	70	80	100	120	140	160		
35	7.6	6.8	6.5	6.3								54	
30	6.5	5.8	5.6	5.4	5.2							66	
25	5.4	4.8	4.7	4.5	4.4	4.2	4.1					84	
20	4.3	3.9	3.7	3.6	3.5	3.4	3.3	3.1				116	
15	3.3	2.9	2.8	2.7	2.6	2.5	2.5	2.3	2.2	2.1	2.0	185	
10	2.2	1.9	1.9	1.8	1.7	1.7	1.6	1.5	1.5	1.4	1.3	↑	
5	1.1	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	185	


JTK 10		$F = \frac{P}{2.40+0.00776 \times LH}$										为不可使用范围	
油压 (MPa)	油缸能力 (kN)	夹紧力 (kN)										最大臂长 (mm)	
		夹紧臂长度 LH (mm)											
		35	40	50	60	70	80	100	120	140	160		
35	14.6	13.1	12.9	12.6								52	
30	12.5	11.2	11.1	10.8	10.5							63	
25	10.4	9.4	9.2	9.0	8.7	8.5						79	
20	8.3	7.5	7.4	7.2	7.0	6.8	6.6	6.3				107	
15	6.3	5.6	5.5	5.4	5.2	5.1	5.0	4.7	4.5	4.3	4.1	164	
10	4.2	3.7	3.7	3.6	3.5	3.4	3.3	3.1	3.0	2.9	2.7	↑	
5	2.1	1.9	1.8	1.8	1.7	1.7	1.7	1.6	1.5	1.4	1.4	164	



JTK 16												$F = \frac{P}{1.72+0.00479 \times LH}$		为不可使用范围	
油压 (MPa)	油缸能力 (kN)	夹紧力 (kN)										最大臂长 (mm)			
		夹紧臂长度 LH (mm)													
		40	50	60	70	80	100	120	140	160	180				
35	20.3	18.3	17.9	17.4	17.0	16.6							83		
30	17.4	15.7	15.3	14.9	14.6	14.3	13.6						101		
25	14.5	13.1	12.8	12.5	12.2	11.9	11.4	10.9					131		
20	11.6	10.5	10.2	10.0	9.7	9.5	9.1	8.7	8.4	8.0	7.7		182		
15	8.7	7.8	7.7	7.5	7.3	7.1	6.8	6.5	6.3	6.0	5.8		297		
10	5.8	5.2	5.1	5.0	4.9	4.8	4.5	4.4	4.2	4.0	3.9		↑		
5	2.9	2.6	2.6	2.5	2.4	2.4	2.3	2.2	2.1	2.0	1.9		297		

夹紧力计算示例


夹紧器型号	JTK06
油压 (P)	20 MPa
夹紧臂长度 (LH)	80 mm
油缸能力	4.3 kN
夹紧力 (F)	3.3 kN



$$F = \frac{P}{4.61+0.0185 \times LH} = \frac{20}{4.61+0.0185 \times 80} \approx 3.3 \text{ kN}$$

外形尺寸图

JTK 02 04 06 10 16 U-L

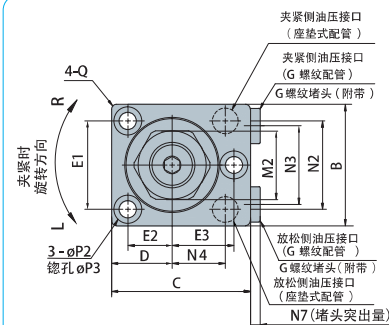


※1

G1/8

G1/4

(mm)					
型 号	JTK02N- L ₂ R ₂ C	JTK04N- L ₂ R ₂ C	JTK06N- L ₂ R ₂ C	JTK10N- L ₂ R ₂ C	JTK16N- L ₂ R ₂ C
A	103	118	137.5	165	191.5
B	39	44	50	62	75
C	28	32	37	46	55
D	34.5	37.5	39.5	49.5	54.5
E	17	21.5	27	33	42.5
F1	30	36	42	51	61
F2	29	34.5	40.5	49.5	59.5
G	12	16	20	25	32
H	51.5	59	66.5	82.5	97
J	15	17	22	25	27
K	33	37	46	53.5	58.5
L (夹紧臂厚度)	22.5	27	27	33	54
M1 (螺母厚度)	6.5	8	9	10	11
M2 (螺母对边宽)	13	17	17	19	27
M4 (推荐紧固扭矩)	M12×1.5 (12 N·m)	M14×1.5 (26 N·m)	M14×1.5 (26N·m)	M20×1.5 (60 N·m)	M30×1.5 (120 N·m)
P1	6	8	11.5	10	9.5
P2	5.5	5.5	6.8	9	11
P3	9.5	9.5	11	14	17.5
Q	51	57	66	82	98
S	M6×1.0	M6×1.0	M8×1.25	M10×1.5	M12×1.75
T	M5 10 ^{-0.021} ₀	M5 10 ^{-0.025} ₀	M6 10 ^{-0.025} ₀	M8 10 ^{-0.030} ₀	M10 10 ^{-0.030} ₀
AA	30	36	42	51	61
AB	31	37	43	52	62
AC	35	38	40	50	55
AD	22.5	24.5	26.5	33.5	38.5
AE	6	7	7	10	10
AF	10	10.5	13	16.5	21.5
AG	25.5±0.5	28±0.5	30±0.5	38.5±1	43.5±1
AH	13±0.5	14±0.5	16.5±0.5	21.5±1	26.5±1
AJ	3	4	4	6	6

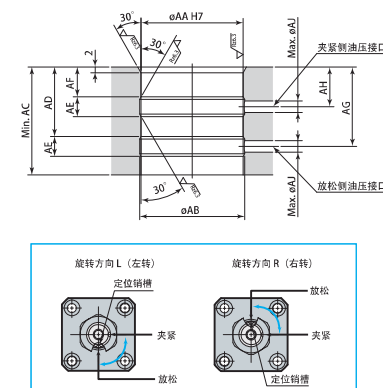


型号表示

JTK ① U- ③ (例: JTK06U-R30)

① 大小(参照规格表)		② 安装与配管型	③ 旋转方向与角度(夹紧时)
JTK	02	U : 上法兰盘	L30 : 左转、旋转角度30°
	04		L45 : 左转、旋转角度45°
	06		L60 : 左转、旋转角度60°
	10		R30 : 右转、旋转角度30°
	16		R45 : 右转、旋转角度45° R60 : 右转、旋转角度60°

上法兰盘、旋转角度 30°、45°、60°

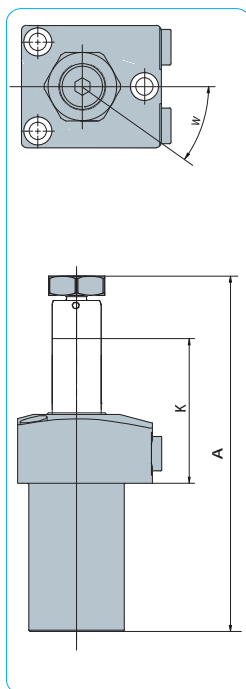

型号	JTK02U- L30 R30	JTK04U- L30 R30	JTK06U- L30 R30	JTK10U- L30 R30	JTK16U- L30 R30
W(旋转角度)	30°±5°				
全行程	11.5	12.5	15.5	18.8	20.3
旋转行程	3.5	4.5	5.5	6.8	8.3
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.0 cm³	1.8 cm³	3.4 cm³	7.8 cm³
	放松	2.3 cm³	4.3 cm³	8.2 cm³	17.0 cm³
A	107.5	123.5	139	168.8	210.3
K	33.5	37.5	46.5	53.8	58.8

型号	JTK02U- L45 R45	JTK04U- L45 R45	JTK06U- L45 R45	JTK10U- L45 R45	JTK16U- L45 R45
W(旋转角度)	45°±5°				
全行程	12.4	13.6	16.9	20.4	22.3
旋转行程	4.4	5.6	6.9	8.4	10.3
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.1 cm³	2.0 cm³	3.7 cm³	8.5 cm³
	放松	2.5 cm³	4.7 cm³	9.0 cm³	18.6 cm³
A	108.4	124.6	140.4	170.4	212.3
K	34.4	38.6	47.9	55.4	60.8

型号	JTK02U- L60 R60	JTK04U- L60 R60	JTK06U- L60 R60	JTK10U- L60 R60	JTK16U- L60 R60
W(旋转角度)	60°±5°				
全行程	13.3	14.8	18.3	22.1	24.4
旋转行程	5.3	6.8	8.3	10.1	12.4
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.2 cm³	2.1 cm³	4.0 cm³	9.2 cm³
	放松	2.7 cm³	5.1 cm³	9.7 cm³	20.1 cm³
A	109.3	125.8	141.8	172.1	214.1
K	35.3	39.8	49.3	57.1	62.9


注1. 本图表示放松状态。

型号表示

JTK ① B- ③ (例: JTK06B-R30)

① 大小(参照规格表)		② 安装与配管型	③ 旋转方向与角度(夹紧时)
JTK	02	B : 下法兰盘	L30 : 左转、旋转角度30°
	04		L45 : 左转、旋转角度45°
	06		L60 : 左转、旋转角度60°
	10		R30 : 右转、旋转角度30°
	16		R45 : 右转、旋转角度45° R60 : 右转、旋转角度60°

下法兰盘、旋转角度 30°、45°、60°

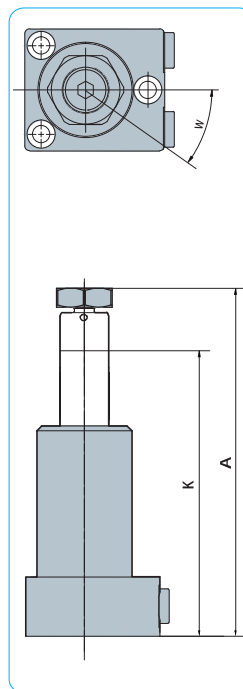

型号	JTK02B- L30 R30	JTK04B- L30 R30	JTK06B- L30 R30	JTK10B- L30 R30	JTK16B- L30 R30
W(旋转角度)	30°±5°				
全行程	11.5	12.5	15.5	18.8	20.3
旋转行程	3.5	4.5	5.5	6.8	8.3
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.0 cm³	1.8 cm³	3.4 cm³	7.8 cm³
	放松	2.3 cm³	4.3 cm³	8.2 cm³	17.0 cm³
A	107.5	123.5	139	168.8	210.3
K	81	91.5	107	129.3	147.3

型号	JTK02B- L45 R45	JTK04B- L45 R45	JTK06B- L45 R45	JTK10B- L45 R45	JTK16B- L45 R45
W(旋转角度)	45°±5°				
全行程	12.4	13.6	16.9	20.4	22.3
旋转行程	4.4	5.6	6.9	8.4	10.3
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.1 cm³	2.0 cm³	3.7 cm³	8.5 cm³
	放松	2.5 cm³	4.7 cm³	9.0 cm³	18.6 cm³
A	108.4	124.6	140.4	170.4	212.3
K	81.9	92.6	108.4	130.9	149.3

型号	JTK02B- L60 R60	JTK04B- L60 R60	JTK06B- L60 R60	JTK10B- L60 R60	JTK16B- L60 R60
W(旋转角度)	60°±5°				
全行程	13.3	14.8	18.3	22.1	24.4
旋转行程	5.3	6.8	8.3	10.1	12.4
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.2 cm³	2.1 cm³	4.0 cm³	9.2 cm³
	放松	2.7 cm³	5.1 cm³	9.7 cm³	20.1 cm³
A	109.3	125.8	141.8	172.1	214.1
K	82.8	93.8	109.8	132.6	151.4

注1. 本图表示放松状态。





型号表示

JTK ① N- ③ (例: JTK06N-R30)

① 大小(参照规格表)		② 安装与配管型	③ 旋转方向与角度(夹紧时)
JTK	02 04 06 10 16	N: 嵌入式	L30: 左转、旋转角度30° L45: 左转、旋转角度45° L60: 左转、旋转角度60° R30: 右转、旋转角度30° R45: 右转、旋转角度45° R60: 右转、旋转角度60°

嵌入式、旋转角度 30°、45°、60°

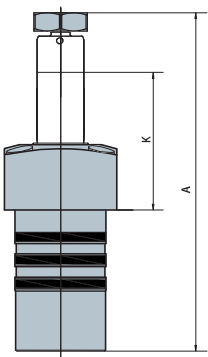

(mm)					
型号	JTK02N- L30 R30	JTK04N- L30 R30	JTK06N- L30 R30	JTK10N- L30 R30	JTK16N- L30 R30
W(旋转角度)	30°±5°				
全行程	11.5	12.5	15.5	18.8	20.3
旋转行程	3.5	4.5	5.5	6.8	8.3
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.0 cm ³	1.8 cm ³	3.4 cm ³	7.8 cm ³
	放松	2.3 cm ³	4.3 cm ³	8.2 cm ³	17.0 cm ³
A	107.5	123.5	139	168.8	210.3
K	29.5	32.5	40.5	46.8	50.3

(mm)					
型号	JTK02N- L45 R45	JTK04N- L45 R45	JTK06N- L45 R45	JTK10N- L45 R45	JTK16N- L45 R45
W(旋转角度)	45°±5°				
全行程	12.4	13.6	16.9	20.4	22.3
旋转行程	4.4	5.6	6.9	8.4	10.3
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.1 cm ³	2.0 cm ³	3.7 cm ³	8.5 cm ³
	放松	2.5 cm ³	4.7 cm ³	9.0 cm ³	18.6 cm ³
A	108.4	124.6	140.4	170.4	212.3
K	30.4	33.6	41.9	48.4	52.3


(mm)					
型号	JTK02N- L60 R60	JTK04N- L60 R60	JTK06N- L60 R60	JTK10N- L60 R60	JTK16N- L60 R60
W(旋转角度)	60°±5°				
全行程	13.3	14.8	18.3	22.1	24.4
旋转行程	5.3	6.8	8.3	10.1	12.4
夹紧行程	8	8	10	12	12
油缸容量	夹紧	1.2 cm ³	2.1 cm ³	4.0 cm ³	9.2 cm ³
	放松	2.7 cm ³	5.1 cm ³	9.7 cm ³	20.1 cm ³
A	109.3	125.8	141.8	172.1	214.1
K	31.3	34.8	43.3	50.1	54.4

注1. 本图表示放松状态。

型号表示

JTK ① ②- ③ X (例: JTK06N-RX)


① 大小(参照规格表)		② 安装与配管型	③ 旋转方向(夹紧时)	
JTK	02 04 06 10 16	U: 上法兰盘 B: 下法兰盘 N: 嵌入式	L: 左转 R: 右转	X: 顶端销规格




使用例

上法兰盘、顶端销规格

JTK ② ④ ⑥ ⑩ ⑩ U-LX

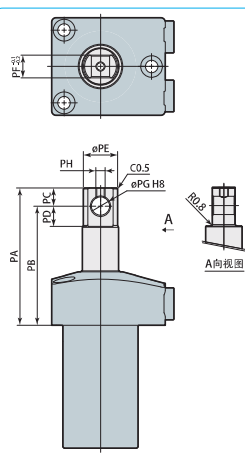

(mm)					
型号	JTK02U- LX RX	JTK04U- LX RX	JTK06U- LX RX	JTK10U- LX RX	JTK16U- LX RX
PA	51.5	60.5	74.5	91	101.5
PB	45.5	52.5	64.5	77	85.5
PC	6	8	10	14	16
PD	7	9	11	15	17
PE	11	15	19	24	30
PF	7.5	10	12	18	20
PG	6 ^{+0.018} ₀	8 ^{+0.022} ₀	10 ^{+0.022} ₀	14 ^{+0.027} ₀	16 ^{+0.027} ₀
PH	M3×0.5	M4×0.7	M5×0.8	M6×1.0	M8×1.25



Technical drawing of a mechanical part, showing a top view and a side view (A-A section).

Top View Dimensions:

- ϕPE : Diameter of the corner holes.
- $\phi PG H8$ (注2): Diameter of the central hole.
- $C0.5$: Fillet radius at the corner hole.
- PH : Height of the top flange.
- PD : Diameter of the central hole.


Side View (A-A) Dimensions:

- PA : Total height of the part.
- PB : Height of the lower section.

Detail View:

- $R0.5$: Fillet radius at the corner hole.
- A : Section line A-A.

(mm)					
型号	JTK02B- LX RX	JTK04B- LX RX	JTK06B- LX RX	JTK10B- LX RX	JTK16B- LX RX
PA	99	114.5	135	166.5	190
PB	93	106.5	125	152.5	174
PC	6	8	10	14	16
PD	7	9	11	15	17
PE	11	15	19	24	30
PF	7.5	10	12	18	20
PG	6 ^{+0.018 0}	8 ^{+0.022 0}	10 ^{+0.022 0}	14 ^{+0.027 0}	16 ^{+0.027 0}
PH	M3×0.5	M4×0.7	M5×0.8	M6×1.0	M8×1.25

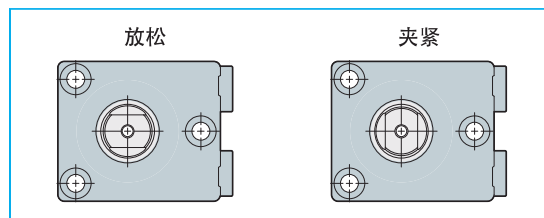

Technical drawing of a mechanical part, showing a top view and a side view (A-A section).

Top View Dimensions:

- Overall width: ϕPE
- Inner hole diameter: ϕPH
- Distance from center to hole center: $\phi PG H8$
- Surface finish: $R0.8$


Side View Dimensions:

- Overall height: PA
- Distance from base to top of the main body: PB
- Distance from base to the start of the threaded section: PC
- Distance from the start of the threaded section to the top of the main body: PD
- Thread specification: $C0.5$

Detail View (A-A Section):

- Shows the internal thread and the surface finish $R0.8$.
- Section line: $A \rightarrow$

(mm)					
型号	JTK02N- LX RX	JTK04N- LX RX	JTK06N- LX RX	JTK10N- LX RX	JTK16N- LX RX
PA	47.5	55.5	68.5	84	93
PB	41.5	47.5	58.5	70	77
PC	6	8	10	14	16
PD	7	9	11	15	17
PE	11	15	19	24	30
PF	7.5	10	12	18	20
PG	6 ^{+0.018 0}	8 ^{+0.022 0}	10 ^{+0.022 0}	14 ^{+0.027 0}	16 ^{+0.027 0}
PH	M3×0.5	M4×0.7	M5×0.8	M6×1.0	M8×1.25

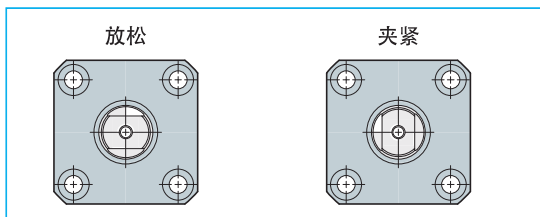

JTK ① U-③ (例：JTK06U-RJ)


① 大小(参照规格表)		② 安装与配管型	③ 旋转方向与角度(夹紧时)
JTK	02	U:上法兰盘	LJ:左转、长行程 RJ:右转、长行程 CJ:直通、长行程
	04		
	06		
	10		
	16		

							(mm)
型 号		JTK02U-U RJ CJ	JTK04U-U RJ CJ	JTK06U-U RJ CJ	JTK10U-U RJ CJ	JTK16U-U RJ CJ	
旋转角度	LJ (左转)	90°±3°					
	RJ (右转)						
	CJ (直通)						
		0°					
全行程		27	29	36	43.5	46.5	
旋转行程		7	9	11	13.5	16.5	
夹紧行程		20	20	25	30	30	
油缸容量	夹紧	2.4 cm³	4.2 cm³	7.8 cm³	18.1 cm³	27.0 cm³	
	放松	5.4 cm³	10.0 cm³	19.1 cm³	39.5 cm³	64.4 cm³	
A		147	164	198.5	229.5	272.5	
H		71.5	78	90.5	111.5	124.5	
K		49	54	67	78.5	85	

JTK 1 U-3 (例：JTK06U-RJ30)

① 大小(参照规格表)		② 安装与配管型	③ 旋转方向与角度(夹紧时)
JTK	02 04 06 10 16	U: 上法兰盘	LJ30 : 左转、长行程、旋转角度30° LJ45 : 左转、长行程、旋转角度45° LJ60 : 左转、长行程、旋转角度60° RJ30 : 右转、长行程、旋转角度30° RJ45 : 右转、长行程、旋转角度45° RJ60 : 右转、长行程、旋转角度60°

上法兰盘、长行程、旋转角度
30°、45°、60°

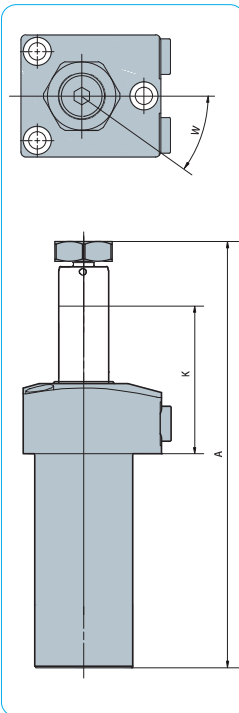

型号	JTK02U- LJ30 RJ30	JTK04U- LJ30 RJ30	JTK06U- LJ30 RJ30	JTK10U- LJ30 RJ30	JTK16U- LJ30 RJ30
W(旋转角度)	30°±5°				
全行程	23.5	24.5	30.5	36.8	38.3
旋转行程	3.5	4.5	5.5	6.8	8.3
夹紧行程	20	20	25	30	30
油缸容量	夹紧	2.1 cm³	3.6 cm³	6.6 cm³	15.3 cm³
	放松	4.7 cm³	8.5 cm³	16.2 cm³	33.4 cm³
A	143.5	159.5	184	222.8	264.3
K	45.5	49.5	61.5	71.8	76.8


型号	JTK02U- LJ45 RJ45	JTK04U- LJ45 RJ45	JTK06U- LJ45 RJ45	JTK10U- LJ45 RJ45	JTK16U- LJ45 RJ45
W(旋转角度)	45°±5°				
全行程	24.4	25.6	31.9	38.4	40.3
旋转行程	4.4	5.6	6.9	8.4	10.3
夹紧行程	20	20	25	30	30
油缸容量	夹紧	2.1 cm³	3.7 cm³	6.9 cm³	16.0 cm³
	放松	4.9 cm³	8.9 cm³	16.9 cm³	34.9 cm³
A	144.4	160.6	185.4	224.4	266.3
K	46.4	50.6	62.9	73.4	78.8

型号	JTK02U- LJ60 RJ60	JTK04U- LJ60 RJ60	JTK06U- LJ60 RJ60	JTK10U- LJ60 RJ60	JTK16U- LJ60 RJ60
W(旋转角度)	60°±5°				
全行程	25.3	26.8	33.3	40.1	42.4
旋转行程	5.3	6.8	8.3	10.1	12.4
夹紧行程	20	20	25	30	30
油缸容量	夹紧	2.2 cm³	3.9 cm³	7.2 cm³	16.7 cm³
	放松	5.1 cm³	9.3 cm³	17.7 cm³	36.4 cm³
A	145.3	161.8	186.8	226.1	268.4
K	47.3	51.8	64.3	75.1	80.9

型号表示

JTH 1 (例：JTH06)

① 大小(参照规格表)	
JTH	01 02 04 06 10 16 25



夹紧臂型号	JTH01	JTH02	JTH04	JTH06	JTH10	JTH16	JTH25
A	30	35	40	50	60	70	90
B	36	41	51	60	72	86.5	110
C	17	23.25	25.75	27	31.75	39.75	49.25
D	22.5	27	33	33	42	54	67.5
E	8.8	11.1	13.5	13.5	17.5	23	29.9
F	M6×1	M8×1.25	M10×1.5	M10×1.5	M12×1.75	M16×2	M20×2.5
G	4	4	4	4	4	4	4
H	22.5	27	33	33	42	54	67.5
J	15.5	19.5	23.3	23.3	31	40	52.4
K	15	18	21	21	28	35	45
L	6	8	9.5	10.5	11	14	17
M	11.5	15	17	17	21	27	33.5
N	M6×1	M8×1.25	M10×1.5	M10×1.5	M12×1.75	M16×2	M20×2.5
P	14	20	22	25	30	35	42
Q	8.5	10.5	12.5	12.5	14.5	18.5	22.5
R	18.75	22.5	27.5	27.5	35	45	56.25
S	23	25.6	32.2	36	44	56	67.5
T	11.25	13.5	16.5	16.5	21	27	33.75
V	30°	30°	30°	25°	25°	25°	23°

