





MT-308

钢珠全硬化式定位柱

A型钢珠用于镜面接触面。

D型塑胶珠用于较易碎或对压力较敏感之接触面。

B型、F型——平面钢珠（F型有压纹）用于表面不平行、由于钢珠有9°倾斜摆动之能力，因此作为固定或支撑时不会扭曲。

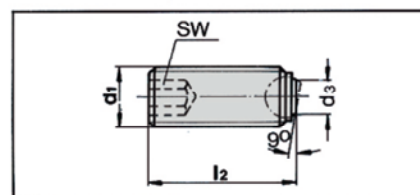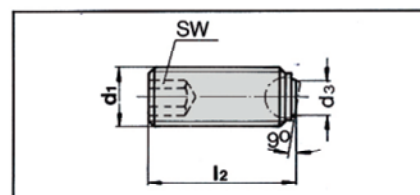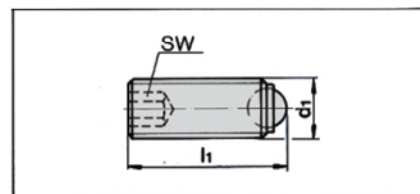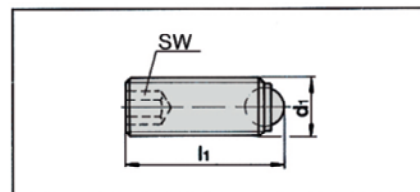

订购范例：

MT-308 AM6x10.8



规格型号	d ₁	d ₃	l ₁	l ₂	d ₄	SW	最大负荷 KN
A/D	M 6	3.2	10.8	—	4	3	9
B	M 6	3.2	—	10	4	3	9★
A/D	M 6	3.2	16.8	—	4	3	9
B	M 6	3.2	—	16	4	3	9★
A/D	M 8	4.5	13.2	—	5.5	4	15
B	M 8	4.5	—	12	5.5	4	15★
A/D	M 8	4.5	31.2	—	5.5	4	15
B	M 8	4.5	—	30	5.5	4	15★
A/D	M 10	6	17.7	—	7	5	20
B/F	M 10	6	—	16	7	5	20★
A/D	M 10	6	36.7	—	7	5	20
B/F	M 10	6	—	35	7	5	20★
A/D	M 12	7.2	22	—	8.5	6	30
B/F	M 12	7.2	—	20	8.5	6	30★
A/D	M 12	7.2	42	—	8.5	6	30
B/F	M 12	7.2	—	40	8.5	6	30★
A	M 16	10.7	28.3	—	12	8	60
B/F	M 16	10.7	—	25	12	8	60★
A	M 16	10.7	53.3	—	12	8	60
B/F	M 16	10.7	—	50	12	8	60★

公司地址：上海市静安区新闻路 1161 号 A1 室

邮编 200041

电话: 021-51872743

传真: 021-62275540

公司网站: www.fdzc.net

E-mail:chengff@sh163.net